

ANTHONY
LIFTGATES, INC.®

1037 W. Howard Street • PO Box 615 • Pontiac, IL 61764
Ph. (815) 842.3383 • Fax. (815) 844.3612 • Toll Free. (800) 482.0003
www.anthonyliftgates.com



PRODUCT GUIDE

WWW.ANTHONYLIFTGATES.COM



CONTENT

Selecting a Liftgate

- 08 Application Guide
- 09 Platform and Ride Type
- 10 Liftgates by Vehicle Application
- 12 Liftgates by Model Type

TuckUnder™ Series Liftgates

- 16 AST Models
- 18 SM Models
- 20 ATU-GLR Models
- 22 DCT Models
- 24 MTU Models

RailTrac® Series Liftgates

- 28 AR Models
- 30 AR-RT Models
- 31 AR-DT Models
- 32 PCR Models
- 34 MRT Models
- 36 MRT-SL Models
- 37 MRT-GB Models

Pickup, Van, & Utility Body Series

- 40 ALB Models
- 42 LA Models

Conventional Series

- 44 AC Models



The Original Liftgate Line. 1941


OVER 75 YEARS OF AMERICAN INNOVATION

William C. Anthony founded the Anthony Company in 1917 with his invention of a gravity type dump box for the Ford Model T. Its success marked the beginning of a long legacy of innovative trucking products.

Anthony introduced the first liftgate, revolutionizing the way goods moved worldwide in 1941.

For over 75 years, Anthony Liftgates have been leading the way with innovative products for trucks of all sizes.

Today, every Anthony gate is still precision crafted in the USA - just down the road from where the first liftgate was born.

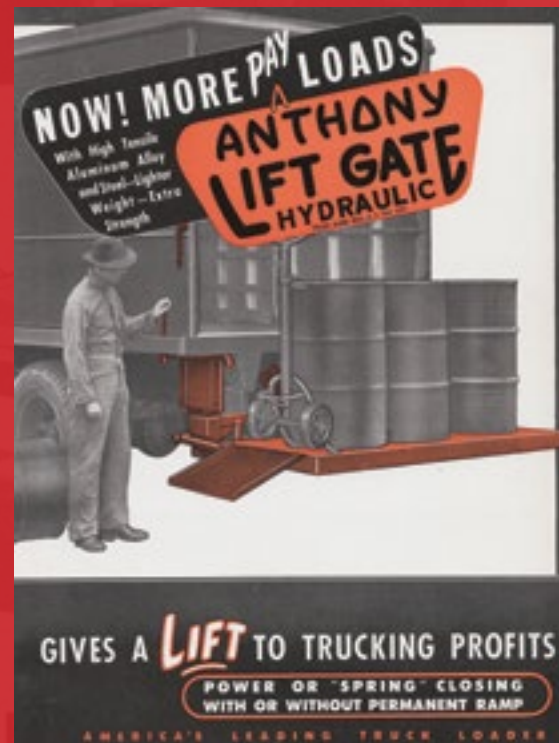

WHY ANTHONY

TOUGH

Life on the back of a truck isn't easy. Whether it's the pavement, the cargo, the dock, or the weather, there's always something trying to stop your truck from moving. Every Anthony gate is built for work in the real world.

DRIVER FRIENDLY

Anthony liftgates are easy to use. Spring-assisted platforms are tuned to make platform operation a breeze. A huge selection of options provide a safe and efficient lift for every kind of cargo.

LOW MAINTENANCE

Anthony liftgates use advanced anti-wear materials and are designed to lift at lower pressures. This means an Anthony liftgate runs longer with less time and money wasted on maintenance and repair.

RELIABLE

Liftgates should solve problems, not create them, so Anthony gates use only top-quality components. Plus, every liftgate must pass a grueling cycle test before it is ready to wear the Anthony badge: Thousands of cycles. Maximum capacity. Not one drop of grease.


ALL-AMERICAN SUPPORT

Because Anthony gates are designed, built, sold, and supported from America's heartland, there's never a worry about ports, borders, or overseas customer support when your truck is down. An Anthony gate means a commitment to support for the long haul, when you need it.

APPLICATION GUIDE


	Available Liftgates Capacity Range (LB)			Ride Type
	Light Duty Vehicle	Medium Duty Vehicle	Heavy Duty Vehicle	
	GVW 14,000 lbs or less	GVW 14,001-26,000 lbs	GVW 26,001 +	
TUCKUNDER™				
AST	1500-3500	1500-3500		Standard Ramping
AST-Plus	2500-3000	2500-3000		Standard Ramping
ATU-GLR	2500-3000	2500-3000		Gentle Level Ride
DCT		2500-3300		Standard Ramping
DCT-WR		2500-3300		Standard Ramping
SM		1800-3000	1800-3000	Standard Ramping
MAGNUM TUCKUNDER™				
MTU-GLR		2500-6000	2500-6000	Gentle Level Ride
MTU-GLR-EX		3000-4000	3000-4000	Gentle Level Ride
MTU-GLR-WR		3000-4000	3000-4000	Gentle Level Ride
RAILTRAC®				
AR	1200-2500	1200-2500		Full Level Ride
AR-RT	1800-2500	1800-2500		Full Level Ride
AR-DT	1200-1800	1200-1800		Full Level Ride
HCR	3000	3000		Full Level Ride
PCR	1800-2500	1800-2500		Full Level Ride
PCR-HC	3000	3000		Full Level Ride
MAGNUM RAILTRAC®				
MRT		3500-6500	3500-6500	Full Level Ride
MRT-SLR		3500-5500	3500-5500	Full Level Ride
GAS BOTTLE RAILTRAC®				
PCR-GB		2500	2500	Full Level Ride
MRT-GB		3500-4500	3500-4500	Full Level Ride
PICKUP, VAN, AND UTILITY BODY				
ALB	1500	1500		Full Level Ride
LA	1600-2000	1600-2000		Full Level Ride
CONVENTIONAL				
AC	1600-2500	1600-2500		Standard Ramping

SELECTING PLATFORM AND RIDE TYPE

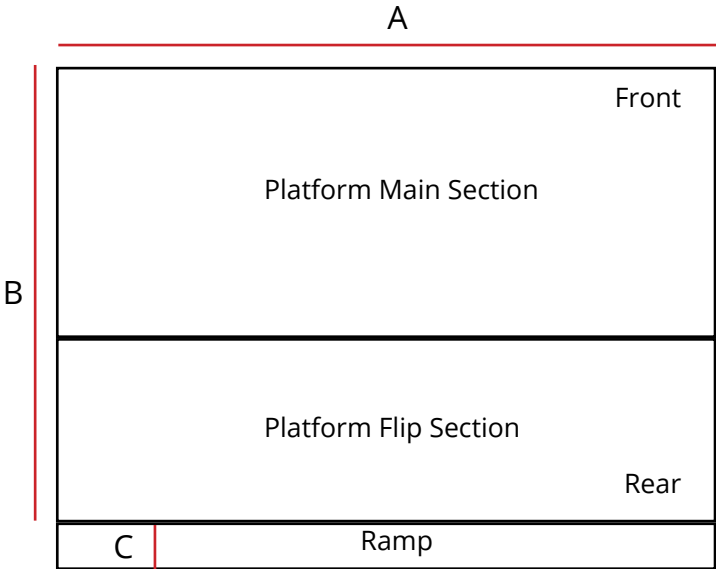


Platform Dimensions

- A Load Area Width
- B Load Area Depth
- C Ramp Depth

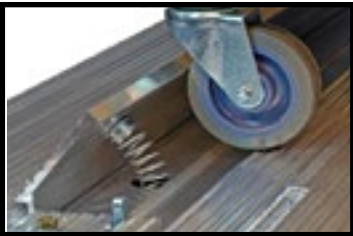


Cart stops optional on most platforms


Ramp Types

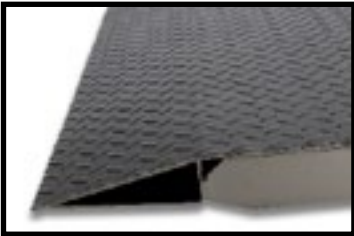

Ramped Platform
Flat Surface with Rear Ramp

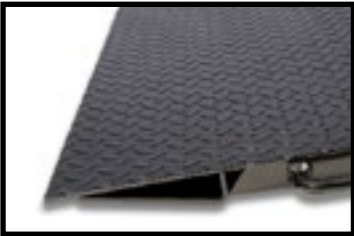

Wedge Platform
Full Taper Front to Back

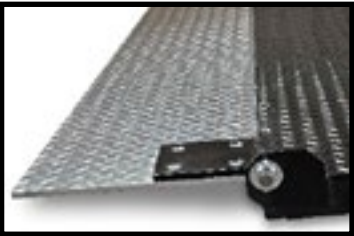

ARR Platform
3-Position Pivoting Ramp

Ride Types



Standard Ramping Ride
Gradual tilt throughout ride



GLR- Gentle Level Ride™
Level ride with ground level tilt



Full Level Ride
Remains level throughout the cycle

LIFTGATE OVERVIEW

BY COMMON VEHICLE APPLICATION



PICKUP

ALB

1500 LBS.
CAPACITY



STAKE BED

AC

1600-2500
LBS.
CAPACITIES



SERVICE BODY

ALB

1500 LBS.
CAPACITY

LA

1600-2000
LBS.
CAPACITIES



VAN & FLATBED

AST

1500-3500
LBS.
CAPACITIES

SM

1800-3000
LBS.
CAPACITIES

ATU-GLR

2500-3000
LBS.
CAPACITIES

DCT

2500-3300
LBS.
CAPACITIES

MTU

2500-6000
LBS.
CAPACITIES

AR

1200-2500
LBS.
CAPACITIES

PCR

1800-2500
LBS.
CAPACITIES

MRT

3500-6500
LBS.
CAPACITIES



TRAILER

MTU

2500-6000
LBS.
CAPACITIES

MRT

3500-6500
LBS.
CAPACITIES



Installations not strictly limited to those presented here.
Call 800-482-0003 for additional information.



LIFTGATE OVERVIEW


BY MODEL TYPE

RAILTRAC®

RailTrac® models mount to the rear frame of a truck or trailer. They move straight up and down, providing a level ride cycle that runs aligned with the truck bed at all times. When stowed, the platform typically covers a portion of the rear doorway. Many models have platforms that may be lowered straight down to provide access to the doorway, or for dock loading.

RailTrac® Series models are chain-driven liftgates suited for light & medium duty trucks. They can be installed on van bodies, flat beds, and stake beds. They are well-suited for low bed height vehicles in need of a large platform, but are not recommended for use in trailer applications.


Magnum RailTrac® Series models are direct hydraulic drive liftgates built for both truck and trailer use. They work well in dock loading, pallet delivery, and wheeled cart delivery, and are commonly used to move laundry, auto parts, food, beverages, batteries, bottled gas, and merchandise.

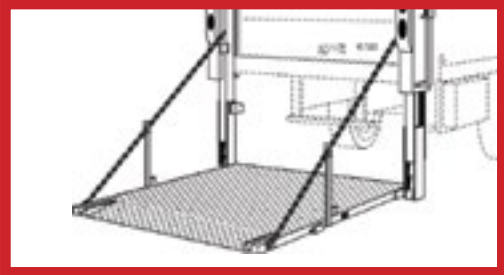

TUCKUNDER™

Tuckunder liftgates mount to the chassis frame of a truck or trailer. They stow folded beneath the rear of the vehicle to provide full access to the rear doorway when not in use.


Anthony offers a broad range of TuckUnder™ models for use on light, medium, and heavy duty vehicles in two different ride styles to suit virtually every application.

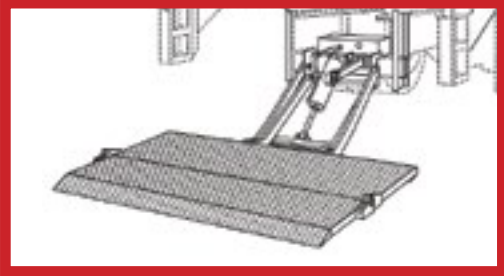

CONVENTIONAL

Conventional liftgates mount to the chassis frame of a truck. They stow upright at the rear of the vehicle, doubling as a tail gate when not in use.


These models are commonly used on stake bed trucks in construction and landscaping applications.

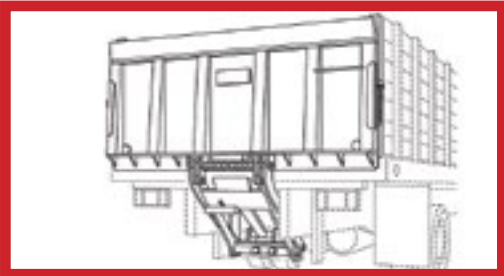

UTILITY

Anthony's utility liftgates mount to the vertical posts and rear edge of a truck. They stow upright at the rear of the vehicles, doubling as a tail gate when not in use.

Utility liftgates make pickups and service body vehicles more versatile, and are valuable in a wide number of applications including roadside tire repair, painting, construction, maintenance, and landscaping.

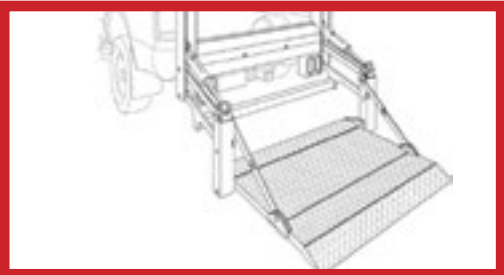



TUCKUNDER™
SERIES

AST TUCKUNDER™

With its simple, rock-solid design, AST (Anthony Standard Tuck) has been the perfect choice for delivery in light and medium truck applications for over 30 years.

Every AST model is packed with quality features purpose-built to deliver years of low maintenance operation. Plus, with a huge selection of available platforms, capacities, and clever options, AST is equipped for the job.

AST MODELS

AST
Available in five capacities from 1500 to 3500 lbs. with a choice of platform styles.

AST-L
With a low-profile floor extension and compact wedge platform, AST-L is designed to fit low bed heights.

AST-PLUS
The most popular AST configurations with a low-profile floor extension for added bed height range. Always in stock, AST-Plus is the quick-quote go-to.



GREASE FREE

In 1993, we set out to develop a liftgate that didn't require grease to save a leasing partner time and money. The result was our unique grease free bushing technology.

Often intimidated, never equalled, these advanced grease free bushings are part of what makes an Anthony more reliable with less maintenance.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY



KEY ADVANTAGES

- Stainless Steel Pump Box
- Heavy Duty Transit Latch
- Low Pressure Hydraulics
- Grease Free

AST-2500 with 80" x 50" steel wedge.

2 YEAR WARRANTY

STANDARD MODELS					
MODEL	AST-1500	AST-2000	AST-2500	AST-3000	AST-3500
Capacity (lbs.)	1500	2000	2500	3000	3500
Bed Height (Min-Max)	42" - 57"	42" - 57"	42" - 57"	42" - 57"	42" - 57"

AVAILABLE PLATFORMS	
Steel or Aluminum 80" x 38" + 5" Ramped	
Steel or Aluminum 80" x 45" + 6" Ramped	
Steel or Aluminum 80" x 50" Wedge	
Steel or Aluminum 80" x 48" + 12" ARR	

LOW BED MODELS		
MODEL	AST-L-1800	AST-L-2500
Capacity (lbs.)	1800	2500
Bed Height (Min-Max)	36" - 44"	36" - 44"

AVAILABLE PLATFORMS	
Steel or Aluminum 80" x 44" Wedge	

ADDED BED HEIGHT RANGE MODELS		
MODEL	AST-PLUS-2500	AST-PLUS-3000
Capacity (lbs.)	2500	3000
Bed Height (Min-Max)	38" - 56"	38" - 56"

AVAILABLE PLATFORMS	
Steel or Aluminum 80" x 50" Wedge	

Cart stops available on any wedge platform
For mounting requirements, visit anthonyliftgates.com/mountingrequirements

SM TUCKUNDER™




Anthony SM (Side Mount) Series liftgates feature all the low-maintenance features of the AST Series, designed for mount on the side of a truck.

With its side mounted position and compact size, SM is ideal for offloading smaller cargo directly to a curb. Available level ride cams help to stabilize top heavy cargo such as milk crates, making SM a great fit for dairy delivery.

RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY

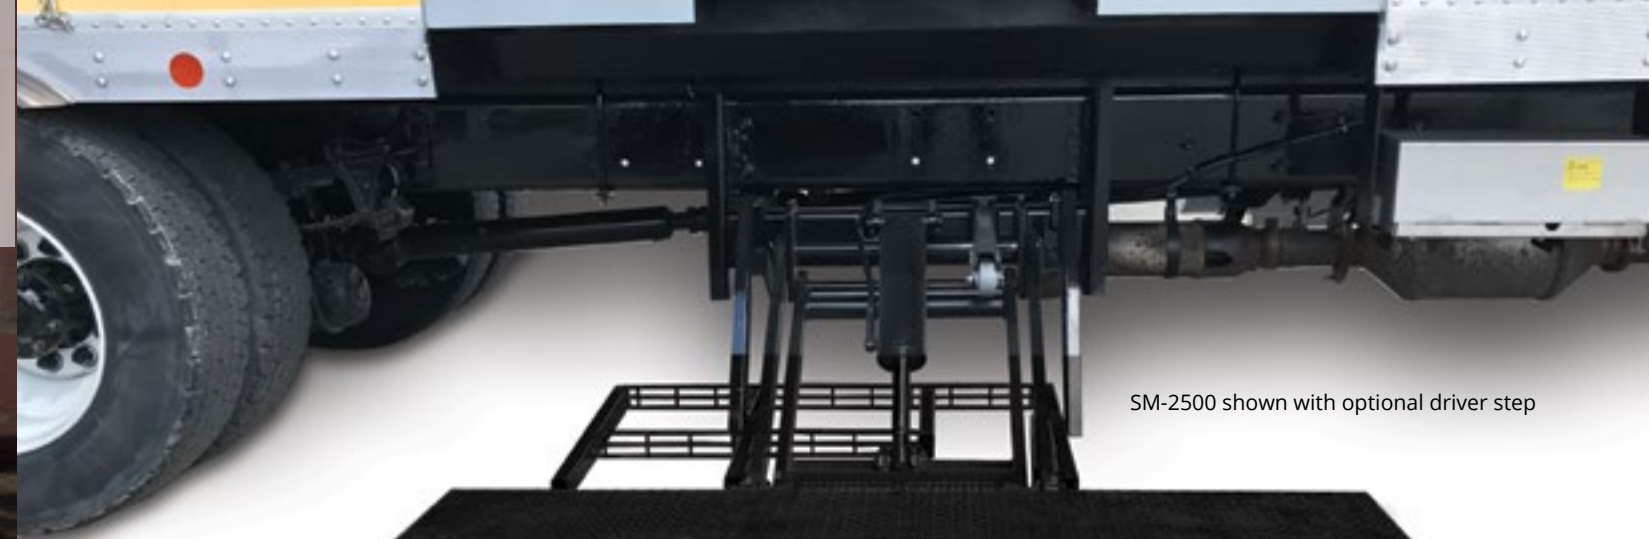

SM-2500 shown with optional driver step

KEY ADVANTAGES

- Stainless Steel Pump Box
- Heavy Duty Transit Latch
- Low Pressure Hydraulics
- Grease Free

2 YEAR WARRANTY

STANDARD MODELS

MODEL	SM-1800	SM-2500	SM-3000
Capacity (lbs.)	1800	2500	3000
Bed Height (Min-Max)	42" - 57"	42" - 57"	42" - 57"

AVAILABLE PLATFORMS

Steel 48" x 34" + 7" Ramped

Steel 72" x 38" + 5" Ramped

For mounting requirements, visit anthonyliftgates.com/mountingrequirements



THE LATEST MANUFACTURING TECHNOLOGY

With the latest manufacturing technology and an experienced midwestern workforce, every liftgate takes shape from raw material to finished product under one roof.

That means better quality control, quicker responses to customers, and a product that is simply built to a higher standard.



ATU-GLR TUCKUNDER™



ATU-GLR (Anthony TuckUnder™ with Gentle Level Ride™) is a rock-solid TuckUnder™ designed to offer premium level ride in a more compact package than full size models like MTU-GLR.

A choice of wedge and ARR platforms provide plenty of room for a variety of cargo. Grease free operation eliminates the expense of routine lubrication. Plus, ATU-GLR's Gentle Level Ride™ feature delivers versatility and increased stability for top-heavy loads.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY



BUILT TO A HIGHER STANDARD

Quality is priority #1, so every Anthony gate is built to a higher standard.


High-strength steel construction, advanced anti-wear materials, waterproof switches, premium power packs, and industry-leading corrosion resistance put Anthony in a class all its own.



KEY ADVANTAGES

- Stainless Steel Pump Box
- Heavy Duty Transit Latch
- Low Pressure Hydraulics
- Gentle Level Ride™
- Grease Free

3 YEAR WARRANTY

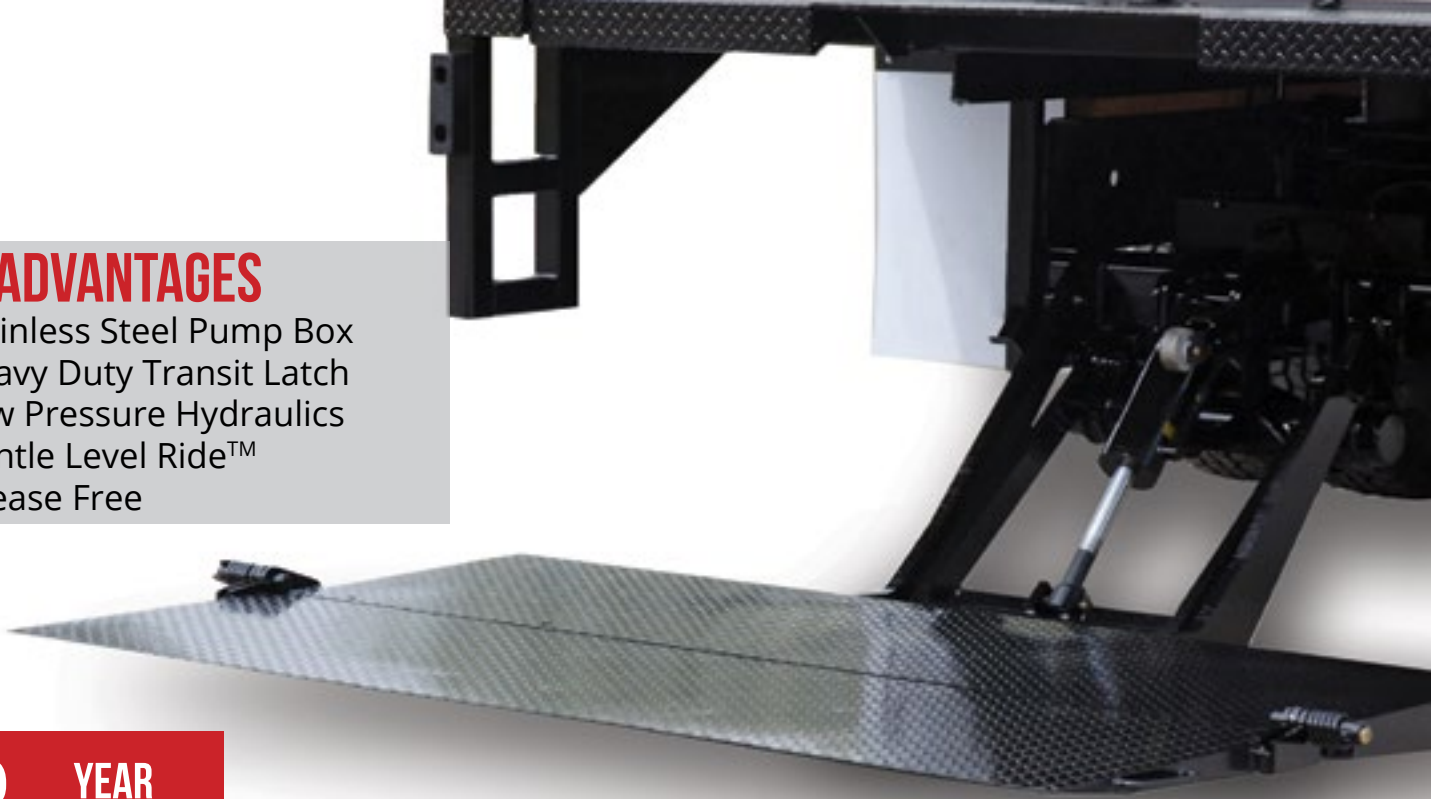

ATU-GLR-25 with 80" x 50" Steel Wedge

STANDARD MODELS

MODEL	ATU-GLR-25	ATU-GLR-30
Capacity (lbs.)	2500	3000
Bed Height (Min-Max)	42" - 55"	42" - 55"

AVAILABLE PLATFORMS

Steel or Aluminum 80" x 50" Wedge

Steel or Aluminum 80" x 48" + 12" ARR

Cart stops available on any wedge platform
For mounting requirements, visit anthonyliftgates.com/mountingrequirements



DCT TUCKUNDER™

The **ALL NEW** DCT (Dual Cylinder TuckUnder™) series is the ultimate combination of simplicity and utility for medium duty trucks. It is easy to install, a breeze to use, and incredibly simple to maintain.

DCT's mid-arm, dual-cylinder design makes for a strong, stable lift. Its straightforward, ramp-ride design and grease free operation keep moving parts and maintenance expenses to a minimum. And with a choice of large wedge platforms, DCT has plenty of working space to handle a variety of cargo.

RECOMMENDED APPLICATIONS

MEDIUM DUTY



DCT MODELS

DCT

Standard DCT models with a choice of large wedge platforms in two popular capacities.

DCT-WR

A walk ramp ready DCT, designed to allow access to a walk ramp without lowering the liftgate from the stowed position.

TESTED TOUGH

Before it's allowed to wear the Anthony badge, every liftgate must endure a grueling endurance test. DCT was subjected to 100,000 cycles at maximum capacity without one drop of grease. The result? Zero failure and no visible signs of wear to critical pivot points.

That's just one example of how an Anthony liftgate is built to outlast the rest.



DCT-33 Endurance Test

KEY ADVANTAGES

- Stainless Steel Pump Box
- Heavy Duty Transit Latch
- Low Pressure Hydraulics
- Grease Free



DCT-25 with 86" x 60" aluminum platform

2 YEAR
WARRANTY

STANDARD MODELS

MODEL	DCT-25	DCT-33
Capacity (lbs.)	2500	3300
BED HEIGHT (Min-Max)		
50" Platform	42" - 57"	42" - 57"
60" Platform	42" - 57"	42" - 57"

AVAILABLE PLATFORMS

Steel or Aluminum 86" x 50" Wedge

Steel or Aluminum 86" x 60" Wedge

WALK RAMP MODELS

MODEL	DCT-WR-25	DCT-WR-33
Capacity (lbs.)	2500	3300
BED HEIGHT (Min-Max)		
50" Platform	49" - 57"	49" - 57"
60" Platform	49" - 57"	49" - 57"

AVAILABLE PLATFORMS

Steel or Aluminum 86" x 50" Wedge

Steel or Aluminum 86" x 60" Wedge

Cart stops available on any wedge platform

For mounting requirements, visit anthonyliftgates.com/mountingrequirements

MTU TUCKUNDER™



MTU-GLR (Magnum TuckUnder™ with Gentle Level Ride™) is the commercial-duty TuckUnder™ for fleets that demand the best. Its high-strength T1 steel arms and twin-cylinder drive form a strong, stable lift. Grease free operation eliminates the expense of routine lubrication. Plus, MTU's Gentle Level Ride™ delivers added versatility and increased stability for top-heavy loads.

MTU's ground contact rollers help protect the liftgate and the pavement from vehicle movement, and its standard power down operation means consistent cycle times in all weather conditions. Plus, with a string of available options engineered for the unique needs of class 8 users, MTU is at home on both straight trucks and trailers.

MTU MODELS

MTU-GLR

The core of the MTU line, with a large selection of capacities and platforms, well-suited to a wide variety of medium and heavy duty trucks and trailers.

MTU-GLR-EX

Extended arms and a deeper floor extension allow the "EX" to stow tighter and reach around the thicker sills of refrigerated bodies and trailers.

MTU-GLR-WR

The walk ramp ready MTU includes provisions to allow full access to a walk ramp without the need to lower the liftgate from the stowed position.

RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY



GENTLE LEVEL RIDE

Smooth, level up/down operation. Platform tilts gently at ground and re-levels before lifting cycle begins.



KEY ADVANTAGES

- Stainless Steel Pump Box
- Heavy Duty Transit Latch
- Standard Power Down
- Gentle Level Ride™
- Grease Free



MTU-GLR-3-A with optional galvanized finish

3 YEAR WARRANTY

STANDARD MODELS

MODEL	MTU-GLR-25	MTU-GLR-3	MTU-GLR-4	MTU-GLR-5	MTU-GLR-6
Capacity (lbs.)	2500	3000	4000	5000	6000
Bed Height (Min-Max)	47" - 57"	47" - 57"	47" - 57"	47" - 57"	47" - 57"

AVAILABLE PLATFORMS

Steel Main/Aluminum Flip or Aluminum 80" x 60" Wedge

WALK RAMP MODELS

MODEL	MTU-GLR-WR-3	MTU-GLR-WR-4
Capacity (lbs.)	3000	4000
Bed Height (Min-Max)	49" - 57"	49" - 57"

AVAILABLE PLATFORMS

Aluminum 80" x 60" Wedge

EXTENDED MODELS

MODEL	MTU-GLR-EX-3	MTU-GLR-EX-4
Capacity (lbs.)	3000	4000
Bed Height (Min-Max)	47" - 57"	47" - 57"

AVAILABLE PLATFORMS

Aluminum 80" x 60" Wedge

Cart stops available on any wedge platform. 84" wide platform available
For mounting requirements, visit anthonyliftgates.com/mountingrequirements



RAILTRAC®
SERIES



AR (Anthony RailTrac®) is a classic medium rail liftgate, with spring- assisted platform operation and an extensive list of available configurations.

Its durable roller chain drive allows all hydraulic components to be guarded safely within the liftgate housing. Lift cycle friction is minimized by advanced anti-wear pads which eliminate the need to lubricate or replace rollers, common in competitive models. Plus, AR offers a huge variety of steel and aluminum platforms, and three corrosion resistance finishes, including stainless steel.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY




MARINE DUTY CONTROLS

Inside every Anthony toggle control is a premium-quality, IP-67 rated, stainless steel switch. Its terminals are fully encased in a thick epoxy coating which guards against dust, moisture intrusion, and loose electrical connections that can lead to unwelcome downtime.



KEY ADVANTAGES

- Spring-Assist Open/Close
- Grease Free
- Low Pressure Hydraulics
- Highly Customizable

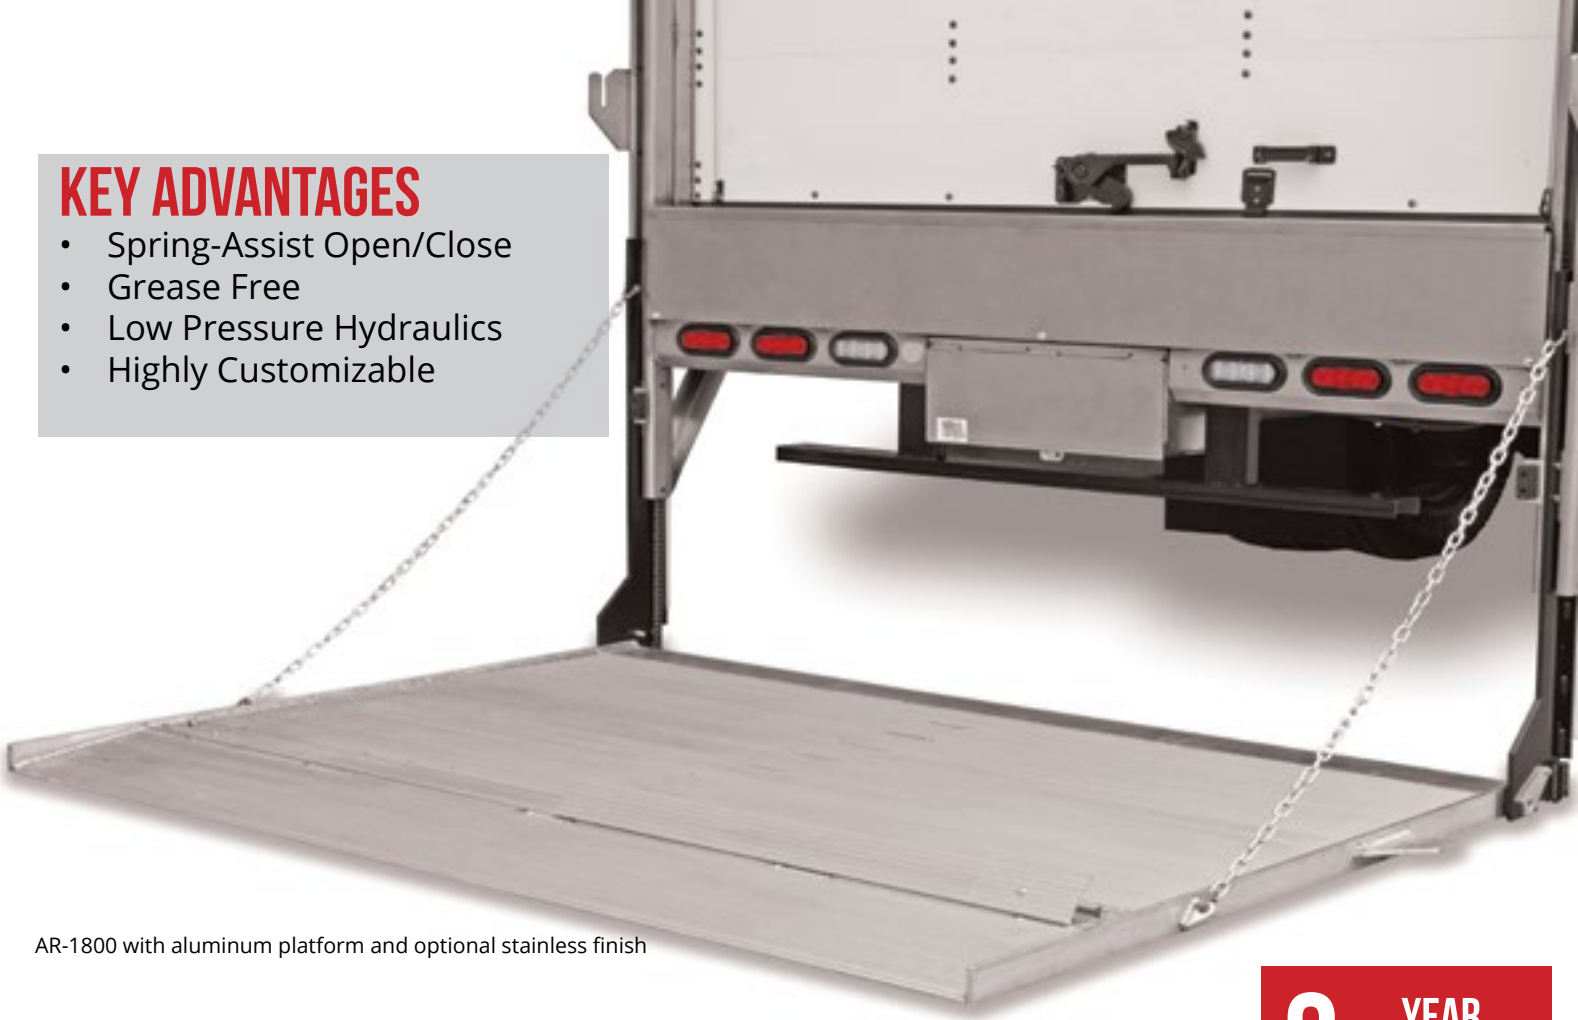

AR-1800 with aluminum platform and optional stainless finish

2 YEAR WARRANTY

STANDARD MODELS

MODEL	AR-1200	AR-1800	AR-2000	AR-2500
Capacity (lbs.)	1200	1800	2000	2500
Bed Height (Min-Max)	28" - 58"	28" - 58"	28" - 58"	28" - 58"

MODEL WIDTH	PLATFORM WIDTH
90" (92" Body)	86"
94" (96" Body)	90"
100" (102" Body)	96"

AVAILABLE PLATFORMS

Single Piece Steel 36" or 42" + 6" Fixed
Single Piece Steel 36" or 42" + 12" Fixed
Single Piece Aluminum 33", 39", 44", 50", 60" + 12" Fixed
Single Piece Aluminum 33", 39", 44", 50", 60" + 12" ARR

Cart stops available on any platform
78" wide models available
For mounting requirements, visit anthonyliftgates.com/mountingrequirements

AR-RT RAILTRAC®



AR-RT (Anthony RailTrac® Rail Tuck) combines the function of a rail-style liftgate with the convenient stowage of a TuckUnder™. It features a folding steel platform which stows at bed height, allowing full access to the rear door.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY



STANDARD MODELS		
MODEL	AR-1800-RT	AR-2500-RT
Capacity (lbs.)	1800	2500
Bed Height (Min-Max)	44" - 58"	44" - 58"
MODEL WIDTH		PLATFORM WIDTH
90" (92" Body)		86"
94" (96" Body)		90"
100" (102" Body)		96"
AVAILABLE PLATFORMS		
Two Piece Steel 42" + 6" Fixed		

*78" Wide Models Available.
For mounting requirements, visit anthonyliftgates.com/mountingrequirements

2 YEAR WARRANTY

AR-DT RAILTRAC®



AR-DT with optional galvanized finish

AR-DT (Anthony RailTrac® Dump-Through) is a medium rail liftgate with all the low maintenance features of the AR series, but with a special dump-through platform which pivots to allow material to pass through the liftgate. With an AR-DT, a dump bed vehicle can do more than just haul and dump bulk materials. It can lift and lower heavy items like plants and equipment, too – a must-have for landscapers.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY



STANDARD MODELS			
MODEL	AR-1200-DT	AR-1800-DT	AR-2000-DT
Capacity (lbs.)	1200	1800	2000
Bed Height (Min-Max)	36" - 58"	36" - 58"	36" - 58"
MODEL WIDTH		PLATFORM WIDTH	
90" (92" Body)		86"	
94" (96" Body)		90"	
AVAILABLE PLATFORMS			

For mounting requirements, visit anthonyliftgates.com/mountingrequirements

2 YEAR WARRANTY



PCR (Power Close RailTrac®) is a classic medium rail liftgate, with the added convenience of a power open-close platform.

Its durable roller chain drive allows all hydraulic components to be guarded safely within the liftgate housing. Lift cycle friction is minimized by advanced anti-wear pads which eliminate the need to lubricate or replace rollers, common in competitive models.

PCR MODELS

PCR
Standard PCR models available with a selection of steel and aluminum platforms.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY



PCR-GB
PCR-GB is a medium duty rail lift specially designed for gas bottle delivery. It includes all the great low maintenance advantages of the PCR series, but with a unique gas bottle handling platform, built to safely handle bottled gas containers.



MADE IN THE U.S.A.
Every Anthony liftgate is precision fabricated in Pontiac, IL.

KEY ADVANTAGES

- Power Open/Close
- Grease Free
- Low Pressure Hydraulics
- Integrated Tail Lights



STANDARD MODELS

MODEL	PCR-1800	PCR-2500
Capacity (lbs.)	1800	2500
Bed Height (Min-Max)	30" - 58"	30" - 58"
MODEL WIDTH		PLATFORM WIDTH
94" (96" Body)		90"
100" (102" Body)		96"

AVAILABLE PLATFORMS

- Single Piece Steel 36" or 42" + 6" Fixed
- Single Piece Steel 36" or 42" + 12" ARR
- Single Piece Aluminum 55" or 60" + 12" Fixed

GAS BOTTLE MODELS

MODEL	PCR-2500-GB
Capacity (lbs.)	2500
Bed Height (Min-Max)	28" - 58"
MODEL WIDTH	PLATFORM WIDTH
94" (96" Body)	90"
100" (102" Body)	96"

AVAILABLE PLATFORM

- 30" Deep Steel Bar Grate Platform + 20" Aluminum Flip Ramp and Gas Bottle Handling Rails

For mounting requirements, visit anthonyliftgates.com/mountingrequirements

2 YEAR WARRANTY



MRT (Magnum RailTrac®) is a premium line of heavy duty rail lifts designed to deliver maximum performance in the most demanding applications. Whether it's delivery of auto parts, beverages, food, or any other rigorous process, MRT can help maximize uptime and minimize operating expenses.

At the heart of every MRT is its self-lubricating V-track slide system which eliminates the need for lubrication and costly roller replacement. MRT's powerful and efficient synchronized dual-motor drive system lifts at low pressures, with the added security of seamless emergency backup. LevelGuard™ helps to prevent cylinder damage from the platform being lowered onto uneven ground.

Anthony is the industry leader in corrosion resistance, with models available in premium polymer, hot dip galvanized, or stainless steel finish. MRT has a rugged and attractive solution for every climate.

CORROSION RESISTANT FINISHES

Choose from standard Anthony premium polymer finish, or optional galvanized or stainless steel finishes.



RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY



KEY ADVANTAGES

- Standard Dual Motors
- Grease Free
- Low Pressure Hydraulics
- Service-Free V-Trac Sliders
- Level-Guard™



3 YEAR WARRANTY

STANDARD MODELS

MODEL	MRT-3500	MRT-4500	MRT-5500	MRT-6500
Capacity (lbs.)	3500	4500	5500	6500
Bed Height (Min-Max)	38" - 58"	38" - 58"	38" - 58"	38" - 58"

MODEL WIDTH	PLATFORM WIDTH
96" Wide Model	80"
100" Wide Model	86"

AVAILABLE PLATFORMS

Two Piece Steel 60" or 72" + 12" Pop-Up Ramp

Two Piece Steel 60" or 72" + 12" Fixed

Two Piece, Steel or Aluminum 72" or 84" + 16" ARR

Cart stops available on ramped platforms, additional platforms available
For mounting requirements, visit anthonyliftgates.com/mountingrequirements

MRT-SL RAILTRAC®



MRT-SL (Magnum RailTrac® Side Load) was specifically designed for food delivery. It includes all the great low maintenance advantages of the MRT series, but with a patented, full-size, three-side loadable platform, which allows a driver to load and unload in tight spaces or directly to a curb.

KEY ADVANTAGES

- Patented 3 Side Loadable Platform
- Standard Dual motors
- Grease Free
- Low Pressure Hydraulics
- Service-Free V-Trac sliders
- Level Guard™

RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY



MRT-GB RAILTRAC®



MRT-GB (Magnum RailTrac® Gas Bottle) is a heavy duty rail lift specially designed for gas bottle delivery. It includes all the great low maintenance advantages of the MRT series, but with a unique gas bottle handling platform, built to safely handle bottled gas containers.

KEY ADVANTAGES

- Standard Dual motors
- Grease Free
- Low Pressure Hydraulics
- Service-Free V-Trac Sliders
- Level Guard™

RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY



3 YEAR WARRANTY

STANDARD MODELS			
MODEL	MRT-SL-3500	MRT-SL-4500	MRT-SL-5500
Capacity (lbs.)	3500	4500	5500
Bed Height (Min-Max)	49" - 58"	49" - 58"	49" - 58"
MODEL WIDTH		PLATFORM WIDTH	
96" Wide Model		80"	
100" Wide Model		86"	
AVAILABLE PLATFORMS			
84" + (1) 16" Rear Ramp and (2) 30" Wide + 33.5" Deep Curb/Road Side Ramps			
For mounting requirements, visit anthonyliftgates.com/mountingrequirements			

STANDARD MODELS		
MODEL	MRT-GB-3500	MRT-GB-4500
Capacity (lbs.)	3500	4500
Bed Height (Min-Max)	38" - 58"	38" - 58"
MODEL WIDTH		PLATFORM WIDTH
96" Wide Model		80"
100" Wide Model		86"
AVAILABLE PLATFORMS		
39" Deep Steel Bar Grate Platform + 16" Aluminim Flip Ramp and Gas Bottle Handling Rails		
For mounting requirements, visit anthonyliftgates.com/mountingrequirements		

3 YEAR WARRANTY



**PICKUP
AND
UTILITY SERIES**

ALB PICKUP & UTILITY BODY



The Anthony ALB (Anthony Load Blazer) is, hands-down, the industry's toughest pickup and service body liftgate. Its dual-cylinder direct drive system lifts with no cables, plus its grease free design means years of smooth operation with no required lubrication.

ALB features an exclusive stabilizer beam which reduces side-to-side platform motion and doubles as a driver step for easy access to the truck bed. For a pickup gate that's truly built for work, there's no substitute for an Anthony ALB.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY



KEY ADVANTAGES

- Stabilizer Beam Step
- Direct Hydraulic Drive
- Grease Free
- Recessed Control
- Platform Doubles as Tailgate



2 YEAR WARRANTY



SIMPLY RELIABLE.

Spend more time trucking and less time maintaining your equipment.

Simple design is one of the best ways to maximize reliability. That's why Anthony liftgates are designed simple -- increased reliability and superior ease of service. In fact, many models can be serviced with nothing more than a few common hand tools.

STANDARD MODELS

MODEL	ALB-1500-57	ALB-1500-61
Capacity (lbs.)	1500	1500
Bed Height (Min-Max)	Up to 46"	Up to 46"
AVAILABLE PLATFORMS		
Steel or Aluminum	46" x 41" + 6" Ramped	50" x 41" + 6" Ramped
Steel Bar Grate	46" x 22"	50" x 22"

Optional tire rack available

For mounting requirements, visit anthonyliftgates.com/mountingrequirements

LA VAN & UTILITY BODY



The LA (Litte Anthony) Series is a classic liftgate designed for use on service bodies and dry vans. It features direct hydraulic drive, a built-in step, standard tail lights, and a recessed toggle switch, plus all hydraulic components are housed safely within the liftgate body.

LA is a great fit for mobile service and roadside tire repair vehicles.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY



KEEP MOVING FORWARD

Get your truck back on the road faster with Anthony.

Anthony's parts and service distribution center is located inside a 134,000 square foot dedicated liftgate production facility in Pontiac, IL where every liftgate is built. This central U.S. location, plus on-site fabrication, and extensive part inventory allows a team of committed customer support professionals to ship parts when you need them most.

KEY ADVANTAGES

- Built-in Step
- Direct Hydraulic Drive
- Recessed Control
- 3-Side Access Platform
- Integrated Tail Lights



2 YEAR WARRANTY

STANDARD MODELS		
MODEL	LA-66	LA-86
Capacity (lbs.)	1600	2000
Overall Width	72"	92"
Bed Height (Min-Max)	Up to 54"	Up to 54"
AVAILABLE PLATFORMS		
Aluminum	65" x 41" + 6" ramped	85" x 41" + 6" ramped
Steel Bar Grate	65" x 27"	85" x 27"

Optional tire rack available, cart stops available on aluminum platforms
For mounting requirements, visit anthonyliftgates.com/mountingrequirements

AC CONVENTIONAL SERIES



The AC conventional liftgate functions similar to the world’s first liftgate, invented by Anthony in 1941.

Its platform stows folded upright, doubling as a tail gate when not in use. AC features a grease free design to provide years of smooth operation without the expense of routine lubrication.

It is best suited for stake bed trucks hauling general cargo, such as construction and landscaping vehicles.

RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY



LOW PRESSURE HYDRAULICS

Anthony liftgates are design to run at low pressure, which puts less strain on hoses, fittings, cylinders, and power units, extending the life of the entire hydraulic system.

Also, every cylinder on an Anthony liftgate is designed to pull when lifting, and to stow in the retracted position in transit. This helps guard the cylinder rods from pitting and corrosion that can prematurely damage seals and lead to shorter cylinder life.



KEY ADVANTAGES


- Platform Doubles as Tailgate
- Heavy duty Transit Latch
- Grease Free
- Stainless Steel Pump Box

2 YEAR WARRANTY

CONVENTIONAL MODELS

MODEL	AC-1600	AC-2000	AC-2500
Capacity (lbs.)	1600	2000	2500
Bed Height (Min-Max)	36" - 57"	36" - 57"	36" - 57"
AVAILABLE PLATFORMS			
Steel 72" x 36" + 6"			
Steel 84" x 36" + 6"			
Steel 90" x 36" + 6"			

Aluminum platforms available by request
For mounting requirements, visit anthonyliftgates.com/mountingrequirements



**LIFT
GATE®**

ANTHONY LIFT GATE®

*America's most complete line of
hydraulically-powered tail-gates*




**4-WAY
POWER**


TO
REDUCE
YOUR
TRUCKING
COSTS



1 POWER OPENING



2 POWER LOWERING




3 POWER LIFTING



4 POWER CLOSING

... all with one handy lever, one hydraulic cylinder

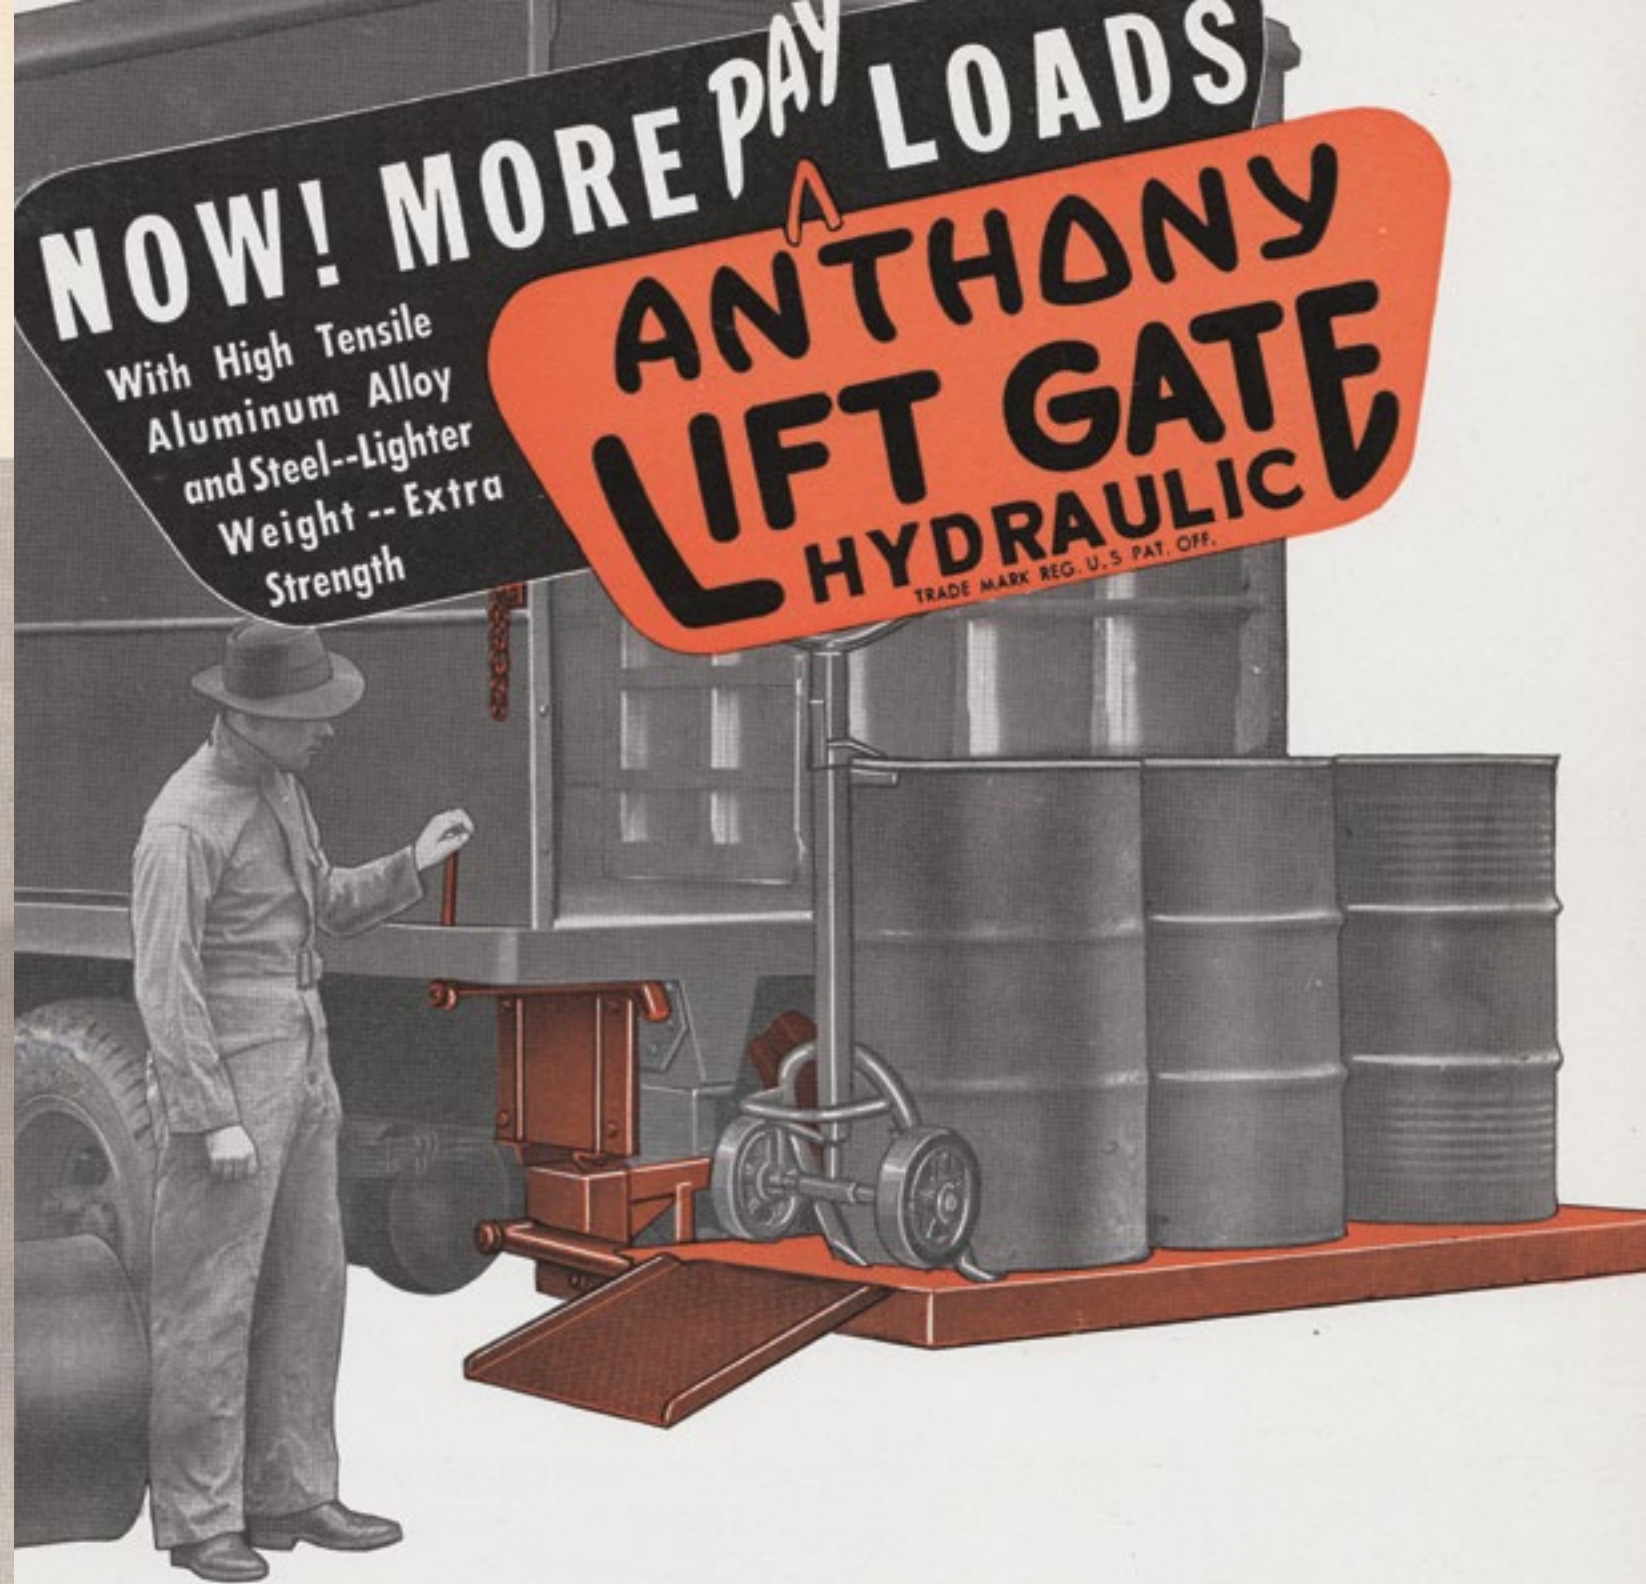

GIVES A **LIFT** TO TRUCKING PROFITS

**POWER OR "SPRING" CLOSING
WITH OR WITHOUT PERMANENT RAMP**